



D-Lux LED Downlights

PRO1300 13W Non-Dimmable Downlight

SN-WH13WS

White

SN-CH13WS

Chrome

SN-BA13WS


Brushed Aluminium



Product Image



Product Line Drawing

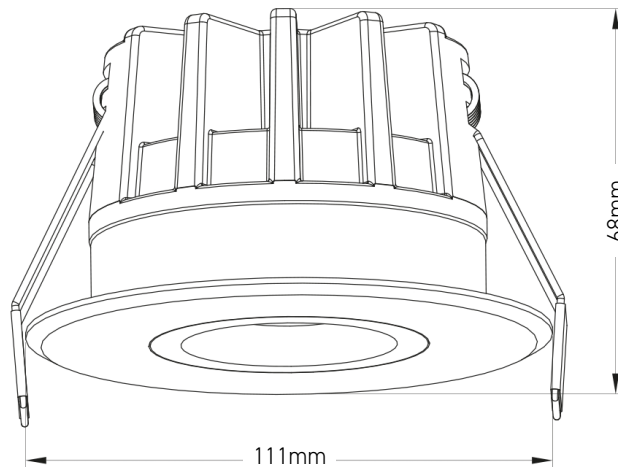

Specification

Voltage	40.7V
Wattage	13W
Colour Temp.	3000K
Lumens	1300lm
IP Rating	65
Dimmable	No
Lens	Optical Grade PMMA
Beam Angle	38°
CRI	Ra>80
Weight	0.5Kg
Heat Sink	Aluminium
Light Depreciation	<30% over 50,000hrs
Connection	Push on
Power Factor	0.9
Cut Out	90mm
Bezel Diameter	110mm
Minimum Void	89mm
Fire Ratings	30, 60min
Air Leakage BS 5250	0.008m ³ /hr/m ² @2pa
Air Tightness Part L	0.049m ³ /hr/m ² @50pa
Acoustic Downgrade	0

Description

The PRO1300 13W is fully compliant to Part L1a and with great colour rendering it delivers quality light with an output greater than a 50W low voltage lamp.

Available in Matt White, Chrome and Brushed Aluminium finishes.

THE DOWNLIGHTS IN THIS RANGE ARE LAMPLESS.
THE LAMP CANNOT BE REMOVED AND ATTEMPTING TO DO SO WILL DAMAGE THE FITTING.